



DATASHEET

GripFactory Anti-Slip Handrail Tape

Tape for handrails becomes an essential part of a modern workplace or public environment. GripFactory Anti-Slip Handrail Tape is the solution for providing handrails and balustrades with an anti-slip layer. GripFactory Anti-Slip Handrail Tape is very easy to apply yourself. Due to the special surface structure, this anti-slip tape has an extremely high anti-slip value but is still very clean to keep.

Easy to apply

GripFactory Anti-Slip Handrail Tape can be applied directly to handrails inside and outside. The material is water-repellent, so the surface cannot freeze. However, it is important that the surface on which the Anti-Slip Handrail Tape is applied to is clean and dry and free from contaminants.

Optimum friction coefficient

GripFactory Anti-Slip Handrail Tape has a symmetrical pattern because it is aesthetically attractive and on the other hand has a high level of friction coefficient. Because of this, our Anti-Slip Handrail Tape is not only suitable for an industrial application where it guarantees that all safety requirements are met, but also in public buildings the Anti-Slip Handrail Tape does not affect the environment.

Easy to clean

For an optimal insulating effect and to prevent the Anti-Slip Handrail Tape from feeling cold, it is equipped with an upper layer of plastic foil. The plastic film works as a fantastic insulator that prevents cold penetration into the user's hand. An additional advantage is that the Anti-Slip Handrail Tape is not abrasive and it can be easily cleaned using all available cleaning methods. GripFactory Anti-Slip Stair Handrail Tape feels like a rubber product, but has the superior shape durability of plastic.

Benefits

With GripFactory Anti-Slip Handrail Tape you are assured of a long-term solution against sliding surfaces.

- Hygienic
- Easy to apply
- Removable
- Sustainable
- Cut to size yourself

Areas of application

- Stairs
- Intermediate platforms

GripFactory B.V.

Industrieweg 4 H
3442 AE Woerden
The Netherlands

+31 (0)348 - 20 30 00

info@gripfactory.nl

www.gripfactoryantislip.com

Technical data

Topic	Resultt
Composition	PVC upper and PET base
Total applied thickness	1.11 mm
Adhesive thickness	0.1 mm
Material thickness	0.8 mm
Total thickness	0.9 mm
Type of adhesive	Solvent acrylic
Tack loop (kg / 25.4 mm)	6.25
Cohesion (minutes / 25 degrees C)	2812
Adhesion to steel (kg / 25.4 mm)	5.716
Maximum size of production roll	1370 mm x 100 m
Life (months)	24

Colors and light reflection values (LRV)

Color	PMS / RAL	LRV (av.)	LRV (range)
Black	-	20,25	2





Friction coefficient

Test standard	Dry surface	Wet surface
Pendulum	92	25
Rz	59,3	



GRIPFACTORY

INNOVATIVE ANTI-SLIP PRODUCTS FOR EVERY SURFACE

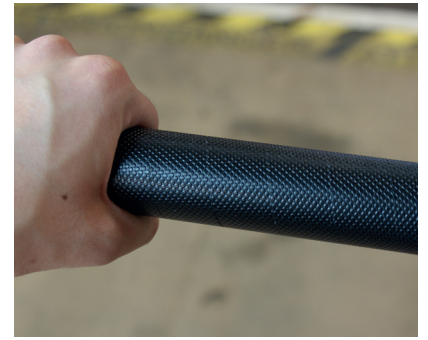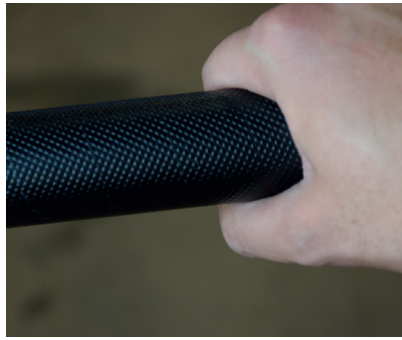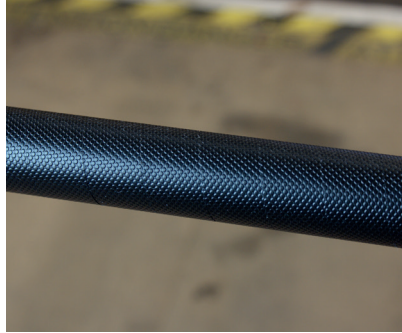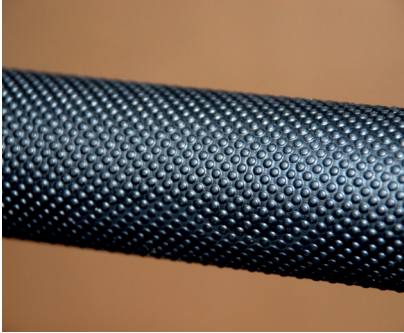

GRIPFACTORY APPLICATION SERVICE

Can't figure it out or do you have any questions? Please contact the GripFactory Service Desk (0348-203000). For an additional charge you can have GripFactory Anti-Slip Handrail Tape applied by a certified applicator.