

MANUAL GRIPFACTORY ANTI-SLIP TILE SPRAY

ATTENTION: The room must be well ventilated.

PREPARATION:

- First test the operation on a loose tile or in an invisible place. Spray this on your tile once or twice. Watch out with dark floors. This is because a "whitening effect" can appear here very quickly.
- Never allow a sprayed floor to dry. Turn off your floor heating well in advance!
- Remove pit and / or drainage covers from stainless steel before application to prevent possible corrosion.
- Make sure that you only enter the wet sprayed floor after neutralization with water.
- Start neutralizing larger areas (> 10 m²) preferably at the point where you started spraying.
- Dry the nozzle of the bottle and make sure that no liquid drips. After use, place the spray bottle on a dry cloth to prevent any leakage.

TIP: Use our application service at a favorable rate.


TIP: Soap deposits can make your floor slippery again. Therefore, maintain your floor after application with the GripFactory TitaniumGrip Cleaner.

APPLICATION:

- Shake the spray bottle well before use.
- Thoroughly clean the surface to be treated with a soap-free cleaner (for example GripFactory TitaniumGrip Cleaner).
- Dry the surface to be treated.
- Remove the spray gun from the package and spray an even layer on the surface to be treated.
- Allow GripFactory Anti-Slip Tile Spray to work in for about three minutes (should not dry out). After the product has been in contact with the floor for three minutes, you must perform a sliding test. Press your foot or wrist on the treated surface and rest your entire body weight on the floor.
- If you are satisfied with the effect and the surface is no longer slippery, clean the surface with plenty of water to neutralize it. If you are not satisfied, wait another minute and carry out a glide test again until you have reached the desired anti-slip level.
- Once you have dried the floor after washing, the anti-slip effect will last for several years.

UNIQUE GUARANTEE:

The innovative anti-slip solution GripFactory Anti-Slip Tile Spray is suitable for ceramic tile floors. However, because each tile floor has a different

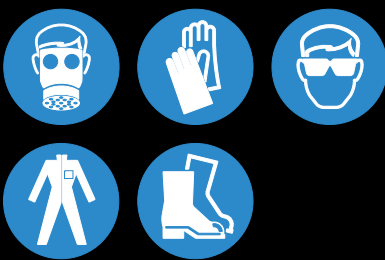

GripFactory B.V.

Industrieweg 4 H
3442 AE Woerden
The Netherlands

+31 (0)348 - 20 30 00
info@gripfactory.nl
www.gripfactoryantislip.com


composition, we advise you to test one tile first. If you like the result, you can treat the rest of your tile floor with the spray bottle. If you do not like the result, you can return the unused materials in the original packaging to GripFactory BV. Your purchase amount will then be refunded.

SAFETY ADVICE:


- Avoid breathing dust / fume / gas / mist / vapors / spray.
- Use only outdoors or in a well-ventilated area.
- After inhalation: remove victim to fresh air and keep at rest in a position comfortable for breathing.
- If swallowed: Call a poison control center or doctor if you feel unwell.
- Wear protective gloves / protective clothing / eye protection / face protection.
- In the event of skin contact: wash with plenty of soap and water.
- In the event of contact with eyes: rinse carefully with water for several minutes. Remove contact lenses if possible. Continue rinsing.
- Do not eat, drink or smoke when using this product.

GripFactory B.V.

Industrieweg 4 H
3442 AE Woerden
The Netherlands

 +31 (0)348 - 20 30 00

 info@gripfactory.nl

 www.gripfactoryantislip.com

GRIPFACTORY APPLICATION SERVICE

Need any help? Then contact the GripFactory Service Desk (+31 348-203000). You can have GripFactory Anti-slip Tile Spray applied by a certified applicator for an additional charge.